

Model 1218 Electronic Tank Gauge

SPECIFICATION SHEET

Application

The Morrison 1218 electronic tank gauge series monitors and displays the liquid level and/or volume of product stored in 1 to 4 aboveground storage tanks. The tank sensor utilizes a mechanical float to monitor the tank liquid level and electronically converts the tank level to display on the system console located within 1000' of the tank sensor.

System Console Features

- 4.3" diagonal color LCD display (480x272 pixels) with auto LED backlight adjustment
- System console displays liquid volume level in horizontal, rectangular, or vertical tanks
- Level units: feet and inches or centimeters (resolution to 1/10 of an inch)
- Volume units: gallons or liters
- Visual and audible alarm indication when alarm condition is activated
- 2 output relays—3 Amps @ 240 VAC
- Simple push to test or acknowledge alarm button
- Ability to test output relay functionality
- USB port functionality—software updates and download event logs
- Configuration setup via Ethernet PC connection, Ethernet Network connection, or manually at console
- NEMA 4X (IP65) indoor/outdoor weather protected, lockable enclosure
- Optional remote secondary console with operational functionality
- Optional External Input/Output Expansion Module adds 6 inputs and 6 output relays (See 1218 External I/O Expansion spec sheet for details)

Tank Sensor Features

- 25' and 50' models available for use with system console
- 2 dry contact, intrinsically safe inputs available in tank sensor for additional simple switch inputs
- 25' tank sensor accuracy +/- 0.3"; 50' tank sensor accuracy +/- 0.6"
- DEF compatible

Configuration Options

- User defined tank identifications, alarm levels, and input alarm labels
- Up to 4 programmable liquid level alarm set points per tank
- Audible alarm ON/OFF and Auto-Silence ON/OFF is programmable by input channel
- Output relays programmable as normally activated or normally deactivated and for desired alarm activations
- Email address book supports email and SMS/text message alarm and status notifications
- Sloped tank and manifold tank functionality available for specific parameters
- Heartbeat power indicator is user selectable




Continued on next page.



Network Connectivity

- Ethernet port connection (RJ-45 connector)
• TCP/IP configured with static IP address or dynamically using DHCP and local host name
• HTTPS secure web-based interface with system console for remote viewing
• Multiple display system consoles can be networked by utilizing Ethernet functionality
• Option: Cellular Gateway connection

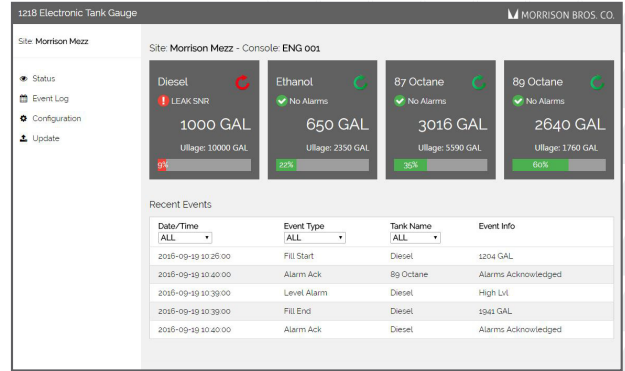

Web-based interface

FuelCloud Connectivity

- Allows FuelCloud accounts to collect tank inventory information from any 1218 tank gauge console with internet service via FuelCloud's web portal

Business Management System Connectivity

- Modbus RTU and TCP interface configuration

Reports

- System stores an event log (up to 1,000 events) and creates a downloadable report
• Event log can be downloaded via network Ethernet connection or via USB port inside system console

Specifications

- Operating temperature range: -40°F to 140°F (-40°C to 60°C); Humidity: 0% to 95% non-condensing
• System console dimensions (H x W x D): 9 3/8" x 7 7/8" x 4 5/8"
• 100-240 VAC +/- 10%, 50/60 Hz

Materials of Construction

- Tank sensor body... Passivated aluminum
• Cable and float... Stainless steel cable and float
• Console enclosure... Polyester fiberglass

*1218S contains the following materials that will be exposed to vapors from stored product: Aluminum, stainless steel, Viton®, UHMW plastic, and steel.

Belden 7933A Cable

- Multi-Conductor - Category 5e Data Tuff® twisted pair cable
• .030" industrial grade sunlight- and oil-resistant PVC jacket
• 24 AWG Bonded-Pairs solid bare copper conductors
• Polyolefin insulation
• Overall Beldfoil® shield (100% coverage) with drain wire
• Operating temperature range: -40°C to 75°C (-40°F to 167°F)

Code Compliance: UL (NEC, CEC/C)-CMR, NEMA 63.1

Category 5e, EU-ROHS, ELV, WEEE, BFR

Table with 3 columns: Item Number, Description, Wt. (lbs). Rows include system console monitors, tank level sensors, and various Belden 7933A cable spools.

Approvals

UL/cUL 913; UL/cUL 508; Listing for Tank Monitoring Equipment for Ordinary Location with Hazardous Location Intrinsically Safe Input Circuits for Class I, Division 1, Group D; Florida DEP EQ-872

