



Model 200 Series Farm/Utility Nozzle

SPECIFICATION SHEET


Lightweight manually-operated shut-off nozzle used for gravity and low pressure fueling.

Features

- Dual outlet threads. Nozzle body accepts either leaded or unleaded spouts
- Replaceable spouts
- Maximum working pressure 25 PSI
- Nozzle trigger pinned in place
- Female NPT threads on inlet

Construction Details

- Aluminum body
- Buna-N (Viton® in 200S) disc
- Brass (stainless steel in 200S) stem
- Buna-N o-ring (Viton® in 200S) stem seal
- Aluminum (15/16" OD) spout leaded
- Aluminum (13/16" OD) spout unleaded

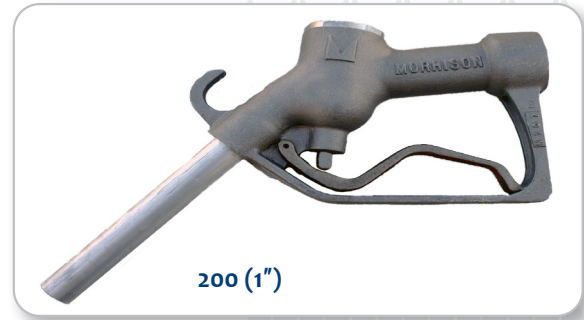

I.D Number	Size	Spout Size	Weight (lbs)
200---0600 AN	3/4"	13/16"	1.75
200---0700 AN	1"	13/16"	1.75
200---0800 AN	3/4"	15/16"	1.75
200---0900 AN	1"	15/16"	1.75
200TMC0600 2N	3/4"	N/A	1.50
200TMC0700 2N	1"	N/A	1.50



MORRISON BROS. CO.

570 E. 7th Street | Dubuque, IA 52001
t. 563.583.5701 | 800.553.4840 | f. 563.583.5028
www.morbro.com

August 2023