



## Model 418 Series Limited Access Test Well Manhole

### Application

The limited access manholes are round with a bolted and gasketed cover. Used for access ports in driveways where limited access and/or water resistant conditions are required. The bolts are standard hex head stainless steel. Meets H-20 load requirements. Each manhole is individually boxed.

### Models

- The **418** has a plain cover. The 18" x 12" and 18" x 18" models use a recessed allen screw.
- The **418XA** has a monitoring well manhole warning and an API symbol on the cover.
- The **418TM** has a cover indicating "TANK MONITOR" for UST leak detection. Bolt down and gasket.


SPECIFICATION SHEET



Fig. 418



Fig. 418XA

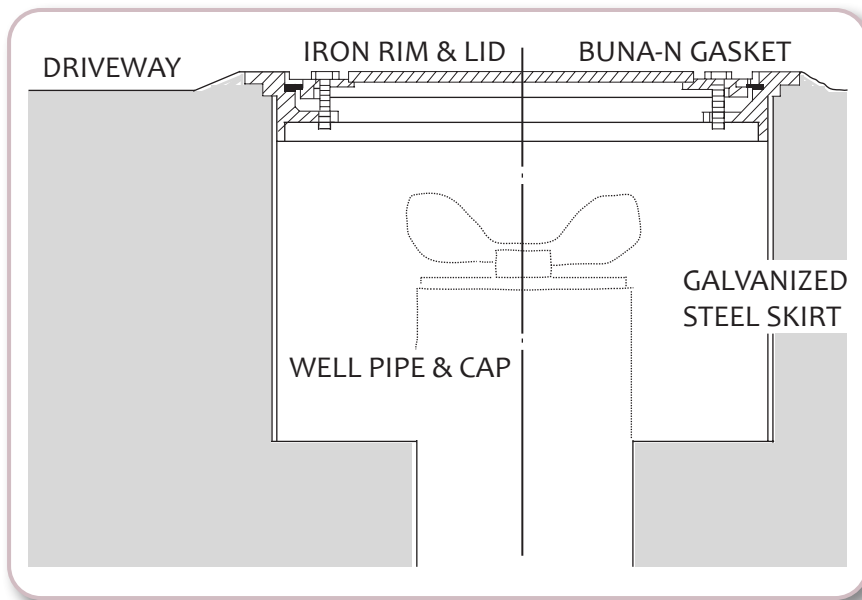

Item numbers on next page...





## Model 418 Limited Access Test Well Manhole (continued)

Item Number	A	B	C	D	E	F	G	H	Screw	Wrench Size	Weight
418---0200 AM	12" x 7"	ST	22GS	Buna-N	SS	N	7"	12"	1/2" HH	3/4"	31.0
418---1000 AM	18" x 12"	ST	14GS	Buna-N	SS	N	13.25"	17.25"	1/2" RA	5/16"	66.0
418---1300 AM	24" x 18"	ST	14S	Buna-N	SS	N	18.6875"	26.656"	3/8" HH	9/16"	104.0
418TM-1100 AM	18" x 12"	CI	14S	Buna-N	SS	N	13.25"	17.25"	1/2" HH	3/4"	72.0
418XA-0500 AM	7" x 10"	CI	22GS	Buna-N	SS	N	10"	6"	5/16" HH	1/2"	8.0
418XA-0900 AM	8" x 12"	CI	22GS	Buna-N	SS	N	13"	8.125"	3/8" HH	9/16"	15.0
418XA-0400 AM	12" x 12"	CI	22GS	Buna-N	SS	N	13"	12"	1/2" HH	3/4"	30.0
418XA-1000 AM	18" x 12"	CI	14S	Buna-N	SS	N	13.25"	17.25"	1/2" HH	3/4"	75.0

### SPECIFICATION OPTIONS:

- A**—Size (inches)
- B**—Cover material: CI (Cast iron); ST (Steel)
- C**—Skirt material: 14, 16, or 22 gauge; GS (Galvanized steel); S (Steel)
- D**—Gasket material: Buna-N
- E**—Bolt material: SS (Stainless steel)
- F**—Painted cover: Y (Yes) or N (No)
- G**—Height (inches)
- H**—Skirt diameter (inches)
- Screw**— Size (inches) and type: RA (Recessed Allen); HH (Hex Head)
- Wrench**—Size (inches)
- Weight**—Shipping weight (lbs)

