

715

REMOTE FILL BOX SERIES



 US LISTED

Florida DEP EQ-787

External Options

715--TT2
715--TT3

- ◆ 10-gallon capacity
- ◆ 14-gauge steel (powder coated white)
- ◆ 2" or 3" top threaded connection
- ◆ Tank or wall mount

715S-TT2
715S-TT3

- ◆ 10-gallon capacity
- ◆ 304 stainless steel
- ◆ 2" or 3" top threaded connection
- ◆ Tank or wall mount

715--TF4
715--TF5

- ◆ 10-gallon capacity
- ◆ 14-gauge steel (powder coated white)
- ◆ 2" or 3" top flanged connection
- ◆ Tank or wall mount

715 - - T T 3 - 2 Q B B - 0

Model Number
Fill Box Construction
- 10-gal. powder coated steel
S 10-gal. 304 stainless steel

Mounting Style
T Tank/Wall

Connection Location
0 No outlet
F Flange
T Top NPT male thread

Connection Thread Size
0 No outlet fitting
2 2" Male NPT nipple
3 3" Male NPT nipple
4 2" 150# Raised face flange
5 3" 150# Raised face flange

Component Size
0 Box only
2 2" components
3 3" components

Item Number	Size	Description	Weight (lbs)
715--T00-0000-0	10-gal.	Top connection with no outlets	101.0
715--TT3-0000-0	3"-10-gal.	Top connection with no internal components	101.0
715--TT3-000B-0	3"-10-gal.	Top connection with hand pump	
715--TT3-2QBB-0	2"-10-gal.	Top connection, female quick disconnect with plug	132.0
715--TT3-2MBB-0	2" - 10-gal.	Top connection, male quick disconnect with cap	132.0
715--TT3-3QBB-0	3" - 10-gal.	Top connection, female quick disconnect with plug	144.0
715--TT3-3MBB-0	3" - 10-gal.	Top connection, male quick disconnect with cap	144.0
715--TT3-2DBB-0	2" - 10-gal.	Top connection, dry-disconnect with cap	135.0
715--TT3-3DBB-0	3" - 10 gal.	Top connection, dry-disconnect with cap	148.0
715--TT3-2MB0-0	2" - 10-gal.	Top connection, male quick disconnect with ball valve	
715--TT3-3MB0-0	3" - 10-gal.	Top connection, male quick disconnect with ball valve	
715S-TT3-0000-0	3" - 10-gal.	Stainless steel top connection with no internal components	101.0
715S-TT3-2QBB-0	2" - 10-gal.	Stainless steel top connection, female quick disconnect w/ plug	132.0
715S-TT3-2MBB-0	2" - 10-gal.	Stainless steel top connection, male quick disconnect w/ cap	132.0
715S-TT3-3QBB-0	3" - 10-gal.	Stainless steel top connection, female quick disconnect w/ plug	144.0
715S-TT3-3MBB-0	3" - 10-gal.	Stainless steel top connection, male quick disconnect w/ cap	144.0
715S-TT3-2DBB-0	2" - 10-gal.	Stainless steel top connection, dry-disconnect with cap	135.0
715S-TT3-3DBB-0	3" - 10-gal.	Stainless steel top connection, dry-disconnect with cap	144.0
715--TF4-0000-0	2" - 10-gal.	Flanged top connection with no internal components	
715S-TF4-0000-0	2" - 10-gal.	SS flanged top connection with no internal components	
715--TF5-0000-0	3" - 10 gal.	Flanged top connection with no internal components	
715S-TF5-0000-0	3" - 10-gal.	SS flanged top connection with no internal components	
715---VR30 AK	3"	Vapor recovery kit	7.0
715---VR40 AK	4"	Vapor recovery kit	7.0
715---P060 AK	60"	Post mount kit	
715---S400 AS		Four-leg stand, powder coated steel	
715S---S400 AS		Four-leg stand, stainless steel	

*Consult Price List for additional options.

Internal Options

Open
0 Box only



Hand Pump Assembly
0 No hand pump assembly
B Base package*
* Hand pump assembly base package: Steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, brass check valve and ball valve.

E E85 Package
* Hand Pump Assembly E85 Package: Steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.

S Stainless Steel Package
* Hand Pump Assembly Stainless Steel Package: Stainless steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.

Ball Valve
0 Box only
B Full port NPT ball valve with brass body, hard chrome plated ball & PTFE seals
S Full port, locking, NPT ball valve with stainless steel body and ball, PTFE seals

Inlet Connection
0 Box only
D Dry disconnect, hardcoated aluminum with stainless steel piston, FKM gaskets, and aluminum dust cap
E Dry disconnect, stainless steel body and piston, FKM gasket, and stainless steel dust cap (only available in 2")
Q 90° quick disconnect aluminum female coupler with stainless steel check valve, FKM seals, and aluminum dust plug
S 90° quick disconnect stainless steel coupler with stainless steel check valve, FKM seals, and stainless steel dust plug
M 90° quick disconnect aluminum male adaptor with stainless steel check valve, FKM seals, and aluminum dust cap

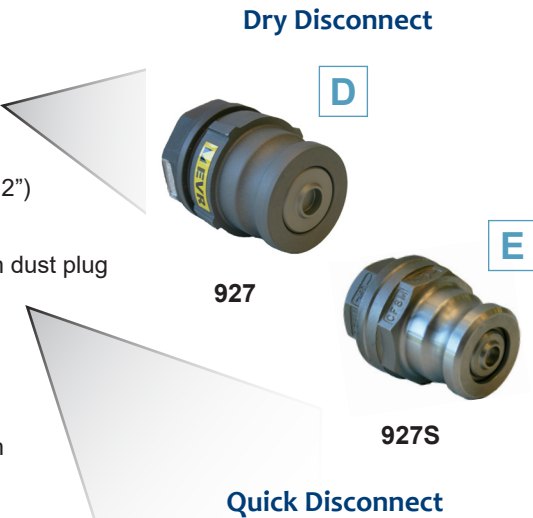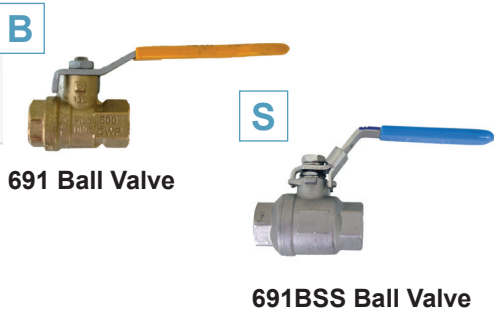

External Options

← 715 F - T K 2 - 2 Q B B - 0 →

Internal Options



715F-TK2

- ◆ 7-gallon capacity
- ◆ 14 gauge steel (powder coated white)
- ◆ 2" back connection
- ◆ In-wall flush mount



715FS-TK2

- ◆ 7-gallon capacity
- ◆ 304 stainless steel
- ◆ 2" back connection
- ◆ In-wall flush mount

Model Number
F 7-gal. powder coated flush wall mount
FS 7-gal. 304 stainless steel

Mounting Style
T Tank/Wall

Connection Location
K Back

Connection Thread Size
2 2" Male NPT nipple

Component Size
2 2" components

Box dimensions

- Width = 24.26" (Flange = 30")
- Height = 32.51" (Flange = 38.50")
- Depth = 19"

Rough opening dimensions for mounting

- Width = 24.875"
- Height = 33.375"

Item Number	Size	Description	Weight (lbs)
715F-TK2-0000-0	2" - 7-gal.	In-wall, back connection with no internal components	120.0
715F-TK2-2QBB-0	2" - 7-gal.	In-wall, back connection, female quick disconnect with plug	162.0
715F-TK2-2MBB-0	2" - 7-gal.	In-wall, back connection, male quick disconnect with cap	162.0
715F-TK2-2DBB-0	2" - 7-gal.	In-wall, back connection, dry-disconnect with cap	162.0
715FS-TK2-2ES0	2" - 7-gal.	SS in-wall, back connection, DEF, with stainless steel dry-disconnect and stainless steel ball valve	129.0
715FS-TK2-2DBB	2" - 7-gal.	SS in-wall, back connection, dry disconnect with cap	129.0
715FS-TK2-2SS0	2" - 7-gal.	SS in-wall, back connection, DEF, stainless steel quick disconnect & stainless steel ball valve	

*Consult Price List for additional options.

Open
0 Box only

Hand Pump Assembly
0 No hand pump assembly
B Base package*
** Hand pump assembly base package: Steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, brass check valve and ball valve.*

E E85 Package
** Hand Pump Assembly E85 Package: Steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.*

S Stainless Steel Package
** Hand Pump Assembly Stainless Steel Package: Stainless steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.*

B **E**

S



Ball Valve
0 Box only
B Full port NPT ball valve with brass body, hard chrome plated ball & PTFE seals
S Full port, locking, NPT ball valve with stainless steel body and ball, PTFE seals

B



691 Ball Valve

S



691BSS Ball Valve

Inlet Connection
0 Box only

D Dry disconnect, hardcoated aluminum with stainless steel piston, FKM gaskets, and aluminum dust cap

E Dry disconnect, stainless steel body and piston, FKM gasket, and stainless steel dust cap (only available in 2")

Q 90° quick disconnect aluminum female coupler with stainless steel check valve, FKM seals, and aluminum dust plug

S 90° quick disconnect stainless steel coupler with stainless steel check valve, FKM seals, and stainless steel dust plug

M 90° quick disconnect aluminum male adaptor with stainless steel check valve, FKM seals, and aluminum dust cap

Dry Disconnect

D



927

E



927S

Quick Disconnect

Q

S

M



External Options

715--TK3



- ◆ 10-gallon capacity
 - ◆ 14-gauge steel (powder coated white)
 - ◆ 2" or 3" back connection
 - ◆ On-wall flush mount
- * Four-leg stand not available for this specific model.*

715S-TK3



- ◆ 10-gallon capacity
- ◆ 304 stainless steel
- ◆ 2" or 3" back connection
- ◆ On-wall flush mount

715--TK5



- ◆ 10-gallon capacity
- ◆ 14-gauge steel (powder coated white)
- ◆ 2" or 3" flanged back connection
- ◆ On-wall flush mount

Item Number	Size	Description	Weight (lbs)
715--TK3-0000-0	10-gal.	Back connection with no internal components	118.0
715--TK3-000B-0	10-gal.	Back connection, fill box only with hand pump	122.0
715--TK3-2QBB-0	2" - 10-gal.	Back connection, female quick disconnect with plug	149.0
715--TK3-2MBB-0	2" - 10-gal.	Back connection, male quick disconnect with cap	149.0
715--TK3-3QBB-0	3" - 10-gal.	Back connection, female quick disconnect with plug	161.0
715--TK3-3MBB-0	3" - 10-gal.	Back connection, male quick disconnect with cap	161.0
715--TK3-2DBB-0	2" - 10-gal.	Back connection, dry disconnect with cap	152.0
715--TK3-3DBB-0	3" - 10-gal.	Back connection, dry disconnect with cap	165.0
715S-TK3-2SSS-0	2" - 10-gal.	SS back connection, DEF, stainless steel female quick disconnect with plug	114.0
715S-TK3-2ESS-0	2" - 10-gal.	SS back connection, DEF, stainless steel dry disconnect with cap	129.0
715S-TK3-3SS0-0	3" - 10-gal.	SS back connection, DEF, stainless steel quick disconnect & stainless steel ball valve	150.0
715S-TK3-3SSS-0	3" - 10-gal.	SS back connection, DEF, stainless steel female quick disconnect with plug	120.0
715S-TK3-3MBB-0	3" - 10-gal.	SS back connection, male quick disconnect with cap	120.0
715S-TK3-3MS0-0	3" - 10-gal.	SS back connection, male quick disconnect, SS ball valve	120.0
715--TK5-0000-0	3" - 10-gal.	Flanged back connection with no internal components	

**Consult Price List for additional options.*

Model Number 715 - - T K 3 - 2 Q B B - 0

Fill Box Construction
- 10-gal. powder coated steel
S 10-gal. 304 stainless steel

Mounting Style
T Tank/Wall
K Back

Connection Location
K Back

Connection Thread Size
2 2" Male NPT nipple
3 3" Male NPT nipple
4 2" 150# Raised face flange
5 3" 150# Raised face flange

Component Size
0 Box only
2 2" components
3 3" components


Internal Options

Open
0 Box only


Hand Pump Assembly
0 No hand pump assembly
B Base package*
E E85 Package
S Stainless Steel Package



Ball Valve
0 Box only
B Full port NPT ball valve with brass body, hard chrome plated ball & PTFE seals
S Full port, locking, NPT ball valve with stainless steel body and ball, PTFE seals

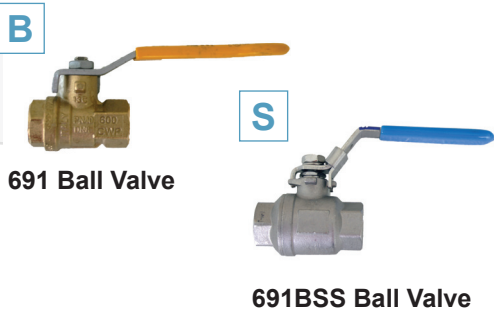

Inlet Connection
0 Box only
D Dry disconnect, hardcoated aluminum with stainless steel piston, FKM gaskets, and aluminum dust cap
E Dry disconnect, stainless steel body and piston, FKM gasket, and stainless steel dust cap (only available in 2")
Q 90° quick disconnect aluminum female coupler with stainless steel check valve, FKM seals, and aluminum dust plug
S 90° quick disconnect stainless steel coupler with stainless steel check valve, FKM seals, and stainless steel dust plug
M 90° quick disconnect aluminum male adaptor with stainless steel check valve, FKM seals, and aluminum dust cap

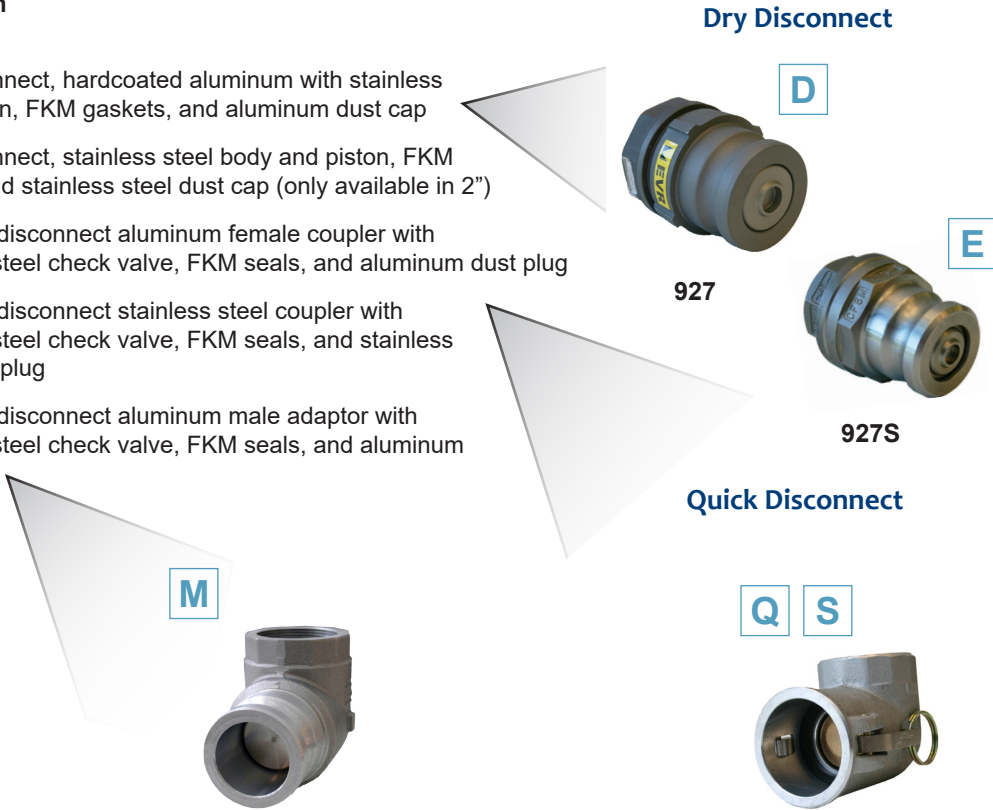

External Options



715--TB2
or
715--TB3

- ◆ 10-gallon capacity
- ◆ 14 gauge steel (powder coated white) or 304 stainless steel
- ◆ 2" or 3" bottom connection
- ◆ Tank or wall mount

Item Number	Size	Description	Weight (lbs)
715--TB2-0000-0	10-gal.	Bottom connection with no internal components	109.0
715--TB3-0000-0	10-gal.	Bottom connection with no internal components	108.0
715--TB2-2MBB-0	2" - 10-gal.	Bottom connection, male quick disconnect with plug	
715--TB2-2QBB-0	2" - 10-gal.	Bottom connection, female quick disconnect with plug	
715--TB3-0000-0	3" - 10-gal.	Bottom connection with no internal components	108.0
715--TB4-0000-0	2" - 10-gal.	Flanged bottom connection with no internal components	
715--TB4-3DBB-0	2" - 10-gal.	Flanged bottom connection, dry-disconnect with cap	
715--TB5-0000-0	3" - 10-gal.	Flanged bottom connection with no internal components	
715--TB5-3DBB-0	3" - 10-gal.	Flanged bottom connection, dry-disconnect with cap	
715--S400 AS		Four-leg stand, powder coated steel	
715S--S400 AS		Four-leg stand, stainless steel	

*Consult Price List for additional options.

† As of March 2018, please note that Bottom Connection models are now 10-gallon capacities instead of 7-gallon. Measurements have also changed.

← 715 - - T B 3 - 2 Q B B - 0 →

Model Number

Fill Box Construction

- 10-gal. powder coated steel
- S 10-gal. 304 stainless steel

Mounting Style

- T Tank/Wall

Connection Location

- B Bottom

Connection Thread Size

- 2 2" Male NPT nipple
- 3 3" Male NPT nipple
- 4 2" 150# Raised face flange
- 5 3" 150# Raised face flange

Component Size

- 0 Box only
- 2* 2" components
- 3 3" components

Internal Options

Open

- 0 Box only

Hand Pump Assembly

- 0 No hand pump assembly
- B Base package*

* Hand pump assembly base package: Steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, brass check valve and ball valve.

E E85 Package

* Hand Pump Assembly E85 Package: Steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.

S Stainless Steel Package

* Hand Pump Assembly Stainless Steel Package: Stainless steel constructed hand pump with PTFE seals and FKM o-rings, reinforced polyurethane tubing, stainless steel check valve and ball valve.

B E



S



Ball Valve

- 0 Box only
- B Full port NPT ball valve with brass body, hard chrome plated ball & PTFE seals
- S Full port, locking, NPT ball valve with stainless steel body and ball, PTFE seals

B



691 Ball Valve

S




691BSS Ball Valve

Inlet Connection

- 0 Box only
- D Dry disconnect, hardcoated aluminum with stainless steel piston, FKM gaskets, and aluminum dust cap
- E Dry disconnect, stainless steel body and piston, FKM gasket, and stainless steel dust cap (only available in 2")
- Q 90° quick disconnect aluminum female coupler with stainless steel check valve, FKM seals, and aluminum dust plug
- S 90° quick disconnect stainless steel coupler with stainless steel check valve, FKM seals, and stainless steel dust plug
- M 90° quick disconnect aluminum male adaptor with stainless steel check valve, FKM seals, and aluminum dust cap

Dry Disconnect

D



927

E



927S

Quick Disconnect


Q S






M






715/ 715S

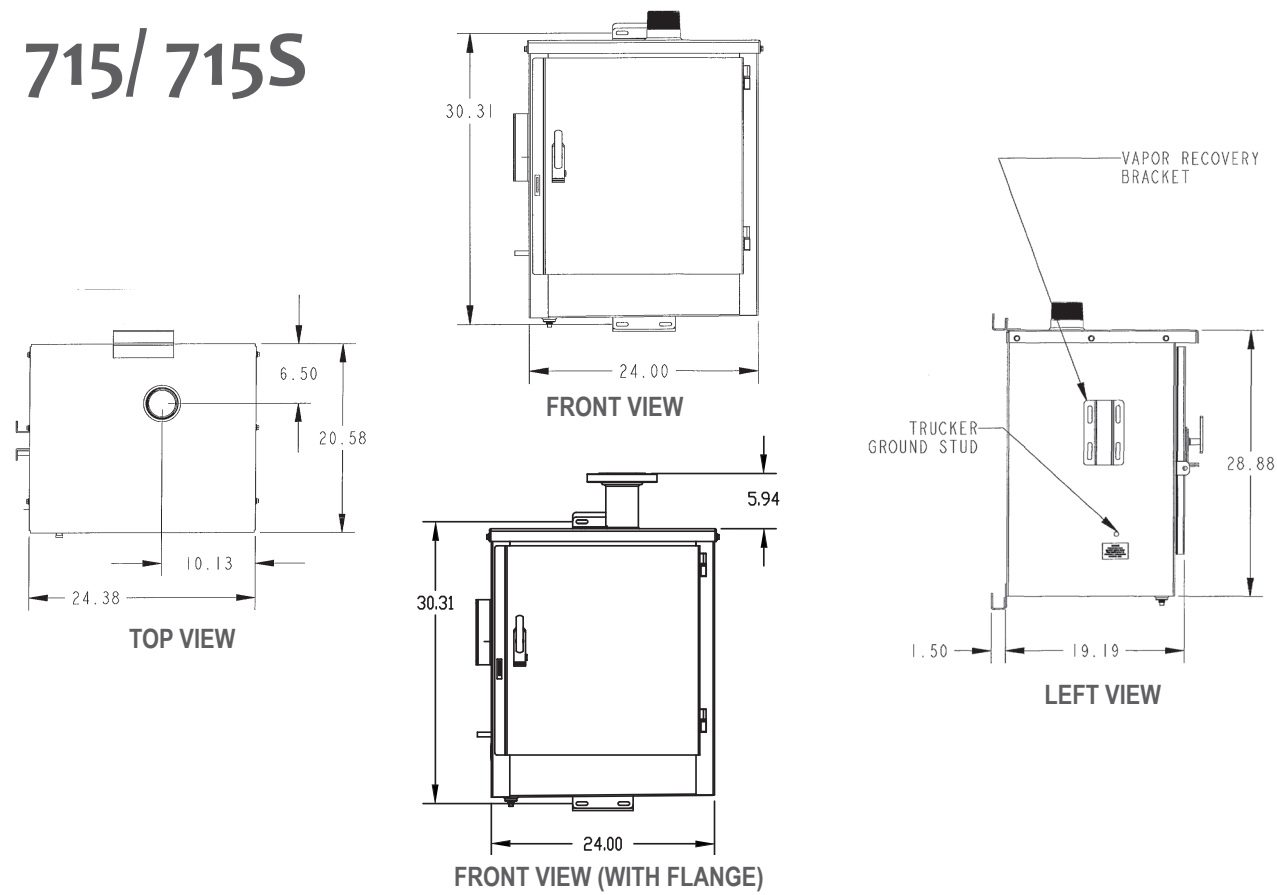


715---TB2/TB3

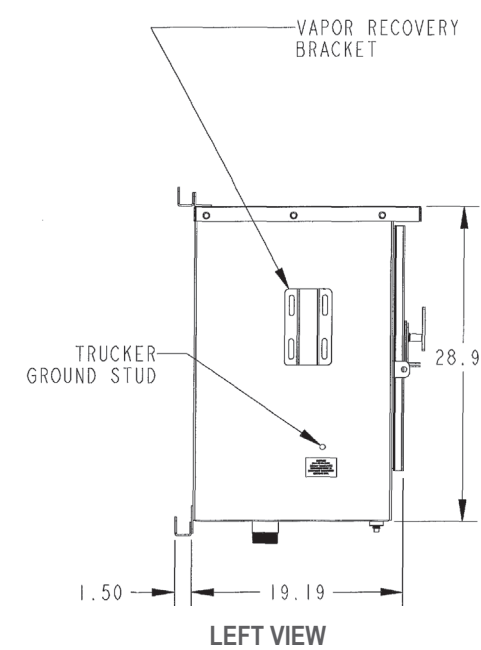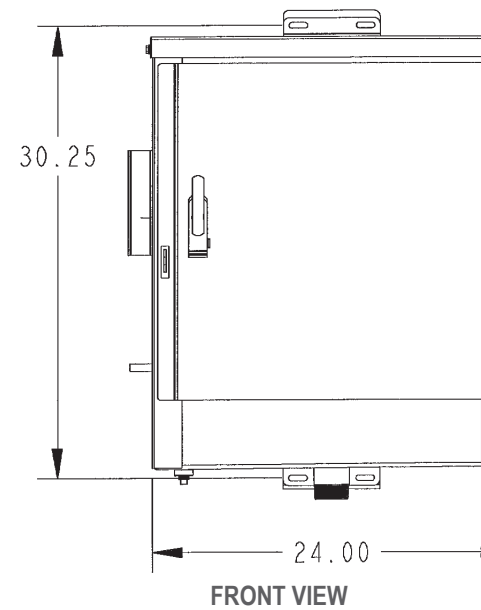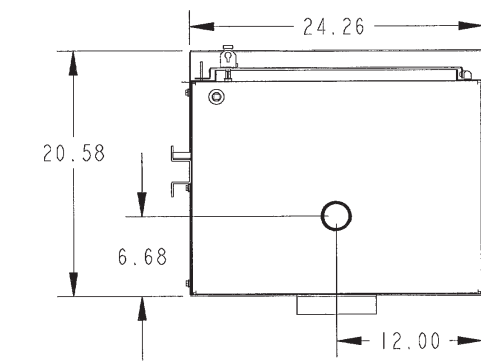

715---TK3

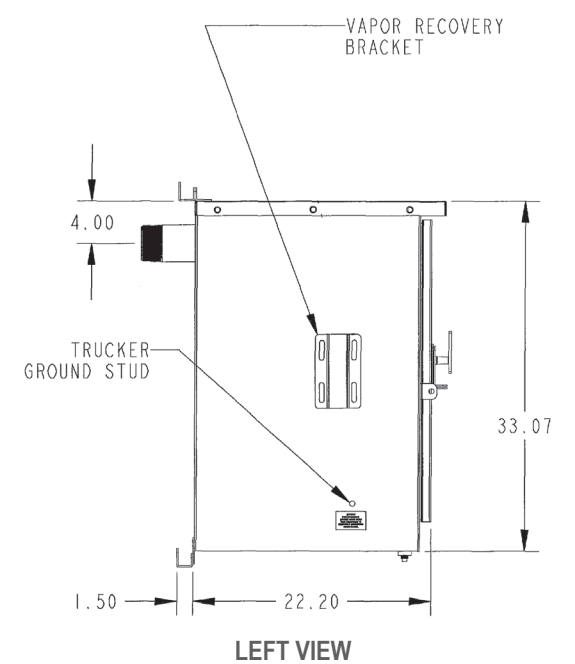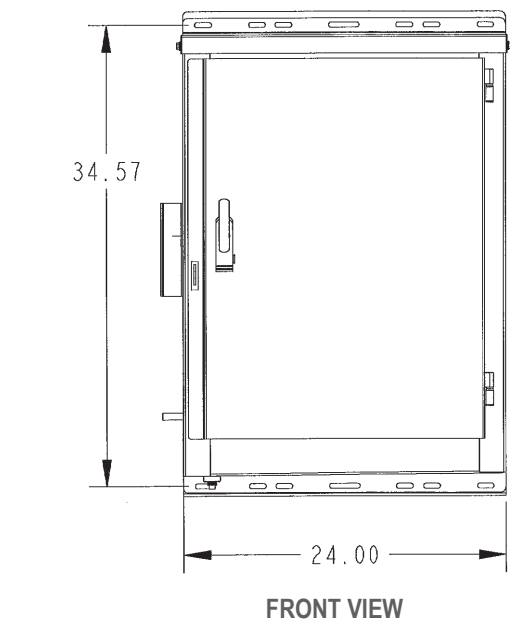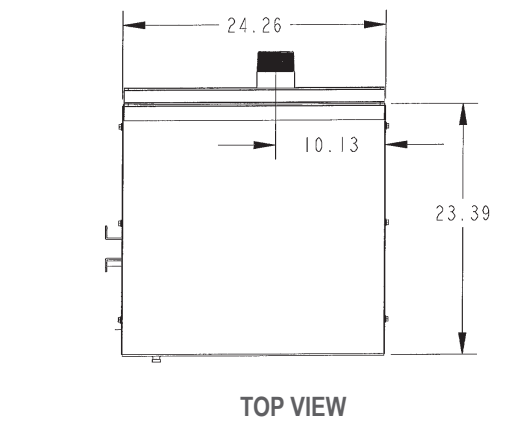

715F

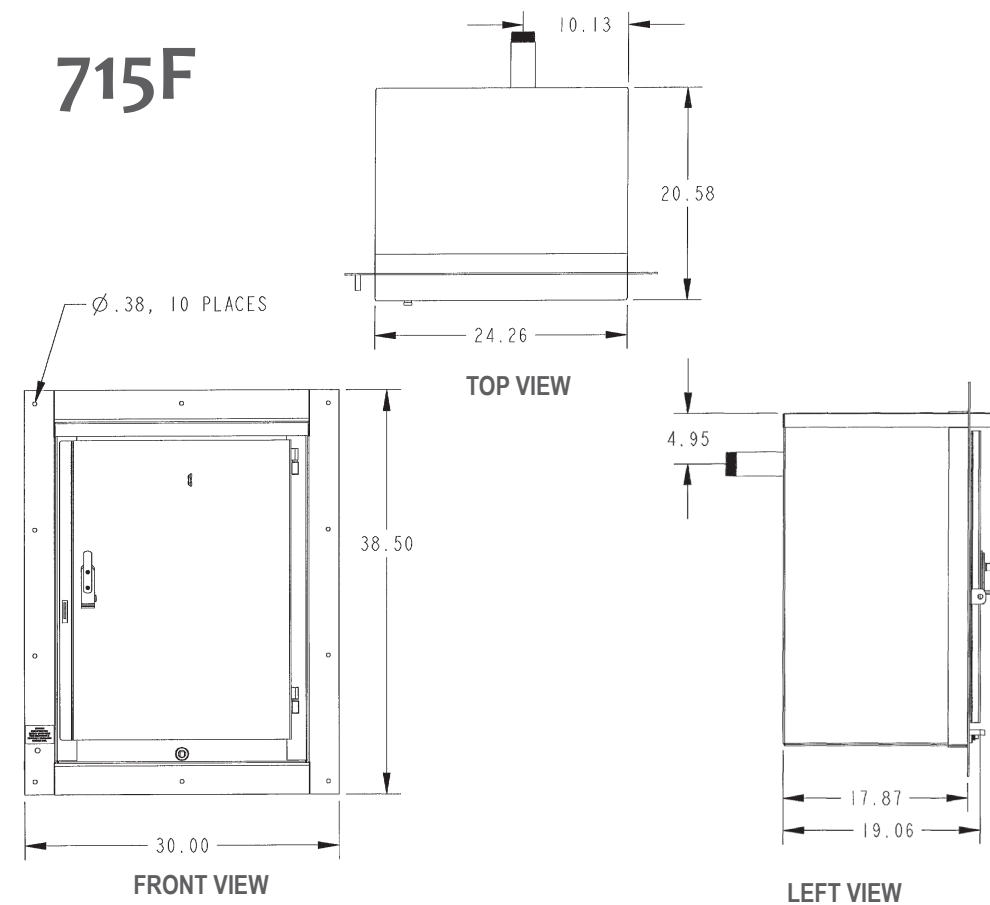

Additional Options:

• **60" Post mount kit:**
715---P060 AK

• **Vapor recovery kits:**
715---VR30 AK (3")
715---VR40 AK (4")

• **Stand:**
715---S400 AS
715S--S400 AS

• **Mounting Plate kit:**
715---0373 AK



Four-leg Stand


Powder-coated steel or
stainless steel stand for
10-gallon models

Post Mount

60" Post with cap, base,
and U-bolts



Vapor Recovery Kit



Mounting Plate

 **MORRISON BROS. CO.**

570 E. 7th Street, P.O. Box 238 | Dubuque, IA 52004-0238

t. 563.583.5701 | 800.553.4840 | f. 563.583.5028 | custserv@morbro.com | www.morbro.com