

Model 618 Simplex Tank Gauge

SPECIFICATION SHEET


The 618 gauging system is used to measure the liquid level in aboveground storage tanks.

Features

- Economical
- Easy-to-read
- Measures liquid level in tanks up to 50 feet tall
- Liquid measurement is graduated into 1/8" increments
- Mechanical gauge works on a simple float and counterweight principle
- Cylindrical floats pass through a 2" opening

Construction Details

- Galvanized steel tape housing
- Stainless steel gauging tape
- Stainless steel gauge wire
- Copper or stainless steel floats

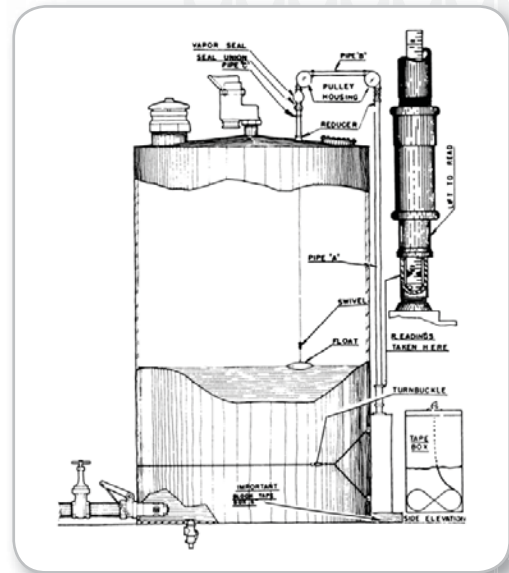

NOTE
Galvanized pipe is not included.

I.D. Number	A	B	C	D	E
618---0100 AG	31	RND	CP	10.12	23
618---0200 AG	31	RND	SS	10.12	26
618---0300 AG	31	CYL	BR	1.75	22
618---0400 AG	31	CYL	SS	1.75	26
618---1700 AG	50	RND	CP	10.12	26
618---1800 AG	50	RND	SS	10.12	26
618---1900 AG	50	CYL	BR	1.75	26
618---2000 AG	50	CYL	SS	1.75	26

SPECIFICATION OPTIONS:

- A** - Tape Length (Feet)
- B** - Float Style: Cylinder (CYL), Round (RND), No Float (NO)
- C** - Float Material: Brass (BR), Stainless Steel (SS), or Standard-Copper (CP)
- D** - Float Diameter (Inches)
- E** - Shipping weight (lbs.)